

OPRAWA ELEWACYJNA LED



LED WALL LUMINARE
LED FASSADENLEUCHTEN
ФАСАДНЫЙ СВЕТИЛЬНИК LED
LED NÁSTĚNNÉ SVĚTIDLO

EL2 VALIT



EL2-R-010GR



EL2-O-010GR



EL2-S-010GR





EL2-Q-008GR



EL2-K-2GU10-GR

MATERIAŁ ► stop aluminium, klosz: PC
MATERIAL ► aluminum alloy, lamp cover: PC
MATERIAL ► aluminiumlegierung, schirm: PC
МАТЕРИАЛ ► алюминиевый сплав, колпак: PC
MATERIÁL ► hliník, střínidlo: PC

- ~ 230V 50Hz
- 8W
- PF >0,5
- PF >0,9
- 3000K 4000K
- CRI Ra ≥ 70
- 2x100° EL2-K
- 120° 2x100°
- IK08
- 25000h
- 25000x
- 40°C -20°C
- IP65

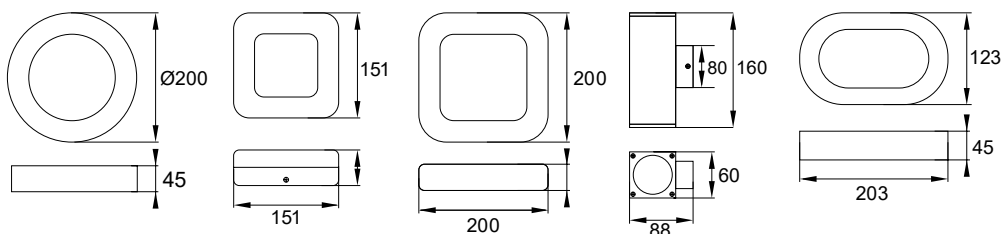

źródło światła LED




dławicze przewodowe



nowoczesny wygląd



EL2-Q-008GR
poprzeczka montażowa



EL2-K-2GU10-GR
dwa gniazda GU10
(brak źródła w zestawie)

BEMKO	EAN	opakowanie	barwa światła [K]	P _{ON} moc w trybie włączenia [W]	strumień świetlny [lm]
kod	EAN			max. 2x GU10 50W	
C25-EL2-K-2GU10-GR	5900280936219	1/20	-		-
C25-EL2-Q-008GR-3K	5900280934963	1/10	3000	8	640
C25-EL2-Q-008GR-4K	5900280934956	1/10	4000	8	680
C25-EL2-O-010GR-3K	5900280936202	1/10	3000	10	800
C25-EL2-O-010GR-4K	5900280936196	1/10	4000	10	850
C25-EL2-R-010GR-3K	5900280935007	1/10	3000	10	800
C25-EL2-R-010GR-4K	5900280934994	1/10	4000	10	850
C25-EL2-S-010GR-3K	5900280934987	1/10	3000	10	800
C25-EL2-S-010GR-4K	5900280934970	1/10	4000	10	850