

EL1 VALANT

LED WALL LUMINARE
LED FASSADENLEUCHTEN
ФАСАДНЫЙ СВЕТИЛЬНИК LED
LED NÁSTĚNNÉ SVÍTIDLO

- 230V
50Hz
- PF >0,5
- PF >0,9
- 3000K
4000K
- CRI Ra≥70
- 120°
100°*
- IK08
- 25000h
- 25000x
- 40°C
-20°C
- IP65



EL1-R-016GR



EL1-N-011GR



EL1-P-020GR




EL1-O-010GR



EL1-N-013GR



EL1-K-007GR

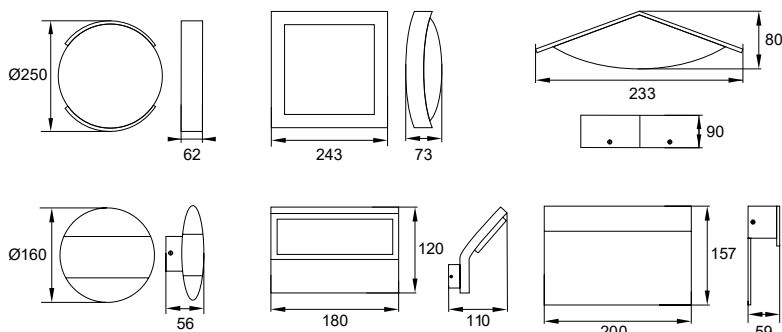

MATERIAL ► stop aluminium, klosz: PC
MATERIAL ► aluminum alloy, lamp cover: PC
MATERIAL ► aluminiumlegierung, schirm: PC
МАТЕРИАЛ ► алюминиевый сплав, колпак: PC
MATERIAL ► hliník, stínidlo: PC



źródło światła LED



EL1-R-016GR diody LED z soczewkami



dławnica przewodowa



kompaktowe rozmiary



EL1-N-011GR numeracja w zestawie



kod



EAN



opakowanie



barwa światła [K]



moc w trybie włączenia [W]



strumień świetlny [lm]

C25-EL1-K-007GR-3K	5900280936288	1/20	3000	8	560
C25-EL1-K-007GR-4K	5900280936271	1/20	4000	8	600
C25-EL1-O-010GR-3K	5900280936264	1/20	3000	10	800
C25-EL1-O-010GR-4K	5900280936257	1/20	4000	10	850
C25-EL1-N-011GR-3K	5900280936868	1/20	3000	11	880
C25-EL1-N-011GR-4K	5900280936875	1/20	4000	11	940
C25-EL1-N-013GR-3K	5900280936882	1/20	3000	13	1040
C25-EL1-N-013GR-4K	5900280936899	1/20	4000	13	1100
C25-EL1-R-016GR-3K	5900280936240	1/10	3000	16	1120
C25-EL1-R-016GR-4K	5900280936233	1/10	4000	16	1180
C25-EL1-P-020GR-3K	5900280936844	1/10	3000	20	1400
C25-EL1-P-020GR-4K	5900280936851	1/10	4000	20	1470